



THAME WORKHOLDING

Field End, Thame Road
Long Crendon, Aylesbury
Bucks HP18 9EJ, England

Tel: 01844 208050

Email: sales@thameworkholding.com




Chuck Type:

KITAGAWA B 08

Fax: 01844 201699

Web: www.thameworkholding.com

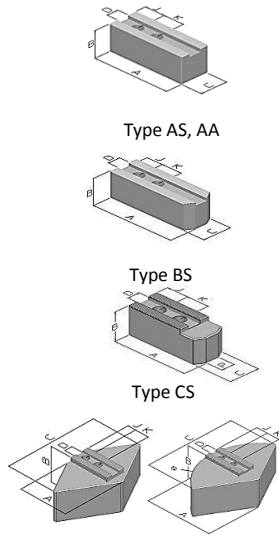

Serrated Soft Top Jaws 1.5x60°		Slot: 14mm			T-Nut to suit GP08		
Jaw Type	A	B	C	Kg/Set	Material	Part No.	
AS	90	35	35	2.2	080M15	BQ08	
AS	95	40	35	2.7	080M15	BO08	
AA	95	44	32	1.1	Aluminium	AA08	
BS	95	35	35	2.4	080M15	BA08	
AS	95	50	35	3.4	080M15	BB08	
AS	95	60	35	4.0	080M15	BC08	
AS	95	80	35	5.4	080M15	DJ08	
AA	95	76	32	1.9	Aluminium	AB08	
AA	95	102	32	2.5	Aluminium	AC08	
CS	85	40	35	2.2	080M15	CK08	
CS	95	40	35	2.9	080M15	CK09	
BS	102	40	35	2.9	080M15	PT08	

Full Wrap Top Jaws 1.5x60°							
DS	89	64	150	14	080M15	CN20	
DA	76	64	150	5.0	Aluminium	HN20	
DA	76	100	150	7.8	Aluminium	HN21	
ES	99	76	210Ø	20	080M15	SG08	
EA	99	76	210Ø	9.8	Aluminium	AG08	

Adjustagrip Hard Jaws - External Clamping					T-Nut to suit GP08		
	B	C	b				
	49	40	20				
Gripping Ranges					590M17		
25-65mm						LB03	
54-93mm						LB06	
81-121mm						LB09	
108-149mm						LB12	

Adjustagrip Hard Jaws - Internal Clamping							
	B	C	b				
	49	40	20		590M17		
Gripping Ranges							
50-82mm						MB06	
72-112mm						MB08	
104-145mm						MB11	
133-174mm						MB14	


Adjustagrip Hard Bar Jaws							
	B	C	Grip Range				
	49	40	16-41mm		590M17	KK20	

Hard Reversible Top Jaws							
A	A	B	C	S1	S2		
	86	50	35	11	11	590M17	GT08

T-Nuts							
	D	H	h	K	Bolt		
	14	23	8	25	M12	817M40	GP08

Height Pins for Adjustagrips							
	H	WAF	Thread				
	5	10	M6			IT05	
	10	10	M6			IT10	
	15	10	M6			IT15	
	20	10	M6			IT20	

Quick Change Jaws							
	A	B	C	K			
Master	67.5	27.5	31.8	25	590M17	QK08	
Standard	90	40	35		080M15	QS08	
Tall	90	60	35		080M15	QT08	
Pointed	105	40	35		080M15	QL08	

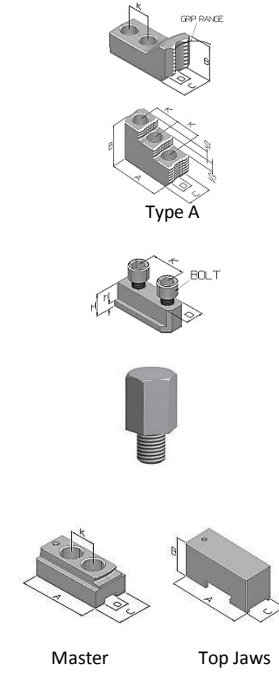

Thame Workholding also design and manufacture jaws to suit your specific workpieces.